



KC IS 15885(Part 2/Sec13)
R-41027766

   SELV IP67   c^{UR} us (Except for 12V)
Note.9  CB EAC CE UK CA

■ Features

- Constant Voltage + Constant Current mode output
- Protection Functions: OCP,SCP,OVP,OTP
- IP67 rating for indoor or outdoor installations
- Output adjustable via potentiometer
- Typical lifetime>50000 hours
- 5 years warranty

■ Applications

- LED bay lighting
- LED stage lighting
- LED flood lighting
- LED strip lighting
- DMX control system


■ GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

■ Description

ELG-300 series is a 300W LED driver featuring with constant current and Constant voltage mode design. ELG-300 operates from 100~305VAC and offers CV mode or CC mode applications. Thanks to the high efficiency up to 94%, with the fanless design, the ambient temperature can be operated for -40°C~+85°C case temperature under free air convection. The design of metal housing and IP67 ingress protection level allows this series to fit both indoor and outdoor applications. Moreover the innovative environment-adaptive capability allows this series to reliably light on the LEDs for all kinds of application environments in almost any spots that may install LED luminaires in the world ,as to provide the optimal design flexibility for LED lighting system.

■ Model Encoding

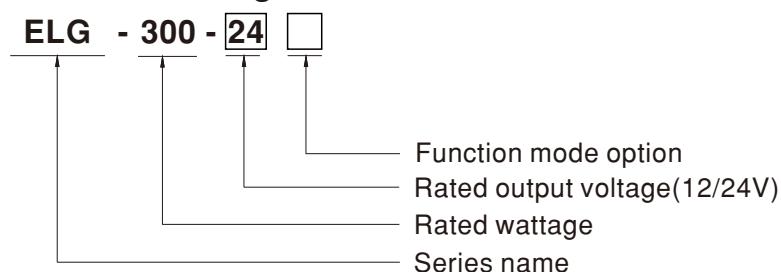


Type	IP Level	Function	Note
A	IP67	Io and Vo adjustable through built-in potentiometer	In Stock

SPECIFICATION


MODEL	ELG-300-12A		ELG-300-24A
OUTPUT	DC VOLTAGE	12V	
	CONSTANT CURRENT REGION Note.2	10~12V	
	RATED CURRENT	200VAC ~ 305VAC	22A
		100VAC ~ 180VAC	18.7A
	RATED POWER	200VAC ~ 305VAC	264W
		100VAC ~ 180VAC	224.4W
	RIPPLE & NOISE (max.) Note.3	150mVp-p	
	VOLTAGE ADJ. RANGE	11.2 ~12.8V	
	CURRENT ADJ. RANGE	11 ~ 22A	
	VOLTAGE TOLERANCE Note.4	±3.0%	
INPUT	LINE REGULATION	±0.5%	
	LOAD REGULATION	±2.0%	
	SETUP, RISE TIME Note.6	500ms, 100ms/230VAC, 500ms, 100ms/115VAC	
	HOLD UP TIME (Typ.)	10ms/ 230VAC 10ms/ 115VAC	
	VOLTAGE RANGE Note.5	100 ~ 305VAC 142 ~ 431VDC (Please refer to "STATIC CHARACTERISTIC" section)	
	FREQUENCY RANGE	47 ~ 63Hz	
	POWER FACTOR	PF ≥ 0.95/115VAC, PF ≥ 0.93/230VAC, PF ≥ 0.90/277VAC@full load	
	TOTAL HARMONIC DISTORTION	THD< 10%(@load ≥ 50%/115V, 230VAC; @load ≥ 75%/277VAC)	
	EFFICIENCY (Typ.)	91% 94%	
	AC CURRENT	3A / 115VAC 1.6A / 230VAC 1.3A/277VAC	
PROTECTION	INRUSH CURRENT(Typ.)	COLD START 45A(twidth=1200μs measured at 50% Ipeak) at 230VAC; Per NEMA 410	
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	2 units (circuit breaker of type B) / 4 units (circuit breaker of type C) at 230VAC	
	LEAKAGE CURRENT	<0.75mA / 277VAC	
	OVER CURRENT	95 ~ 108% Constant current limiting, recovers automatically after fault condition is removed	
ENVIRONMENT	SHORT CIRCUIT	Constant current limiting, recovers automatically after fault condition is removed	
	OVER VOLTAGE	13.5 ~ 17V	27 ~ 34V
	OVER TEMPERATURE	Shut down output voltage, re-power on to recover	
	WORKING TEMP.	Tcase=-40 ~ +85°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)	
SAFETY & EMC	MAX. CASE TEMP.	Tcase=+85°C	
	WORKING HUMIDITY	20 ~ 95% RH non-condensing	
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH	
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 60°C)	
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes	
OTHERS	SAFETY STANDARDS	UL8750(type "HL") (Except for 12V), CSA C22.2 No. 250.13-12; ENEC BS EN/EN61347-1, BS EN/EN61347-2-13 independent, BS EN/EN62384; EAC TP TC 004; GB19510.1, GB19510.14; KC61347-1, KC61347-2-13; IS15885(Part2/Sec13), IP67 approved; Designed refer to AS/NZS 61347 & AS/NZS 60598	
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2.0KVAC O/P-FG:1.5KVAC	
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH	
	EMC EMISSION	Compliance to BS EN/EN55015, BS EN/EN61000-3-2 Class C (@load ≥ 50%) ; BS EN/EN61000-3-3; GB/T 17743, GB17625.1; KN15	
	EMC IMMUNITY	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11; BS EN/EN61547, light industry level (surge immunity Line-Earth 6KV, Line-Line 4KV), KN61547	
NOTE	MTBF	1827.7K hrs min. Telcordia SR-332 (Bellcore) ; 196.5Khrs min. MIL-HDBK-217F (25°C)	
	DIMENSION	246*77*39.5mm (L*W*H)	
	PACKING	1.45 Kg; 9pcs / 13.5Kg / 0.76CUFT	
1. All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature. 2. Please refer to "DRIVING METHODS OF LED MODULE". 3. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1μF & 47μF parallel capacitor. 4. Tolerance : includes set up tolerance, line regulation and load regulation. 5. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details. 6. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time. 7. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. (as available on https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf) 8. This series meets the typical life expectancy >50,000 hours of operation when Tcase, particularly (Tc) point (or TMP, per DLC), is 70°C or less. 9. RCM is on a voluntary basis. Non IC classification Independent LED control gear is not suitable for residential installations. 10. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com 11. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft). 12. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch without permanently connected to the mains. 13. For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED_EN.pdf 14. This series need to consider build in using to comply with Type HL application. ☺ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx			

■ Block Diagram

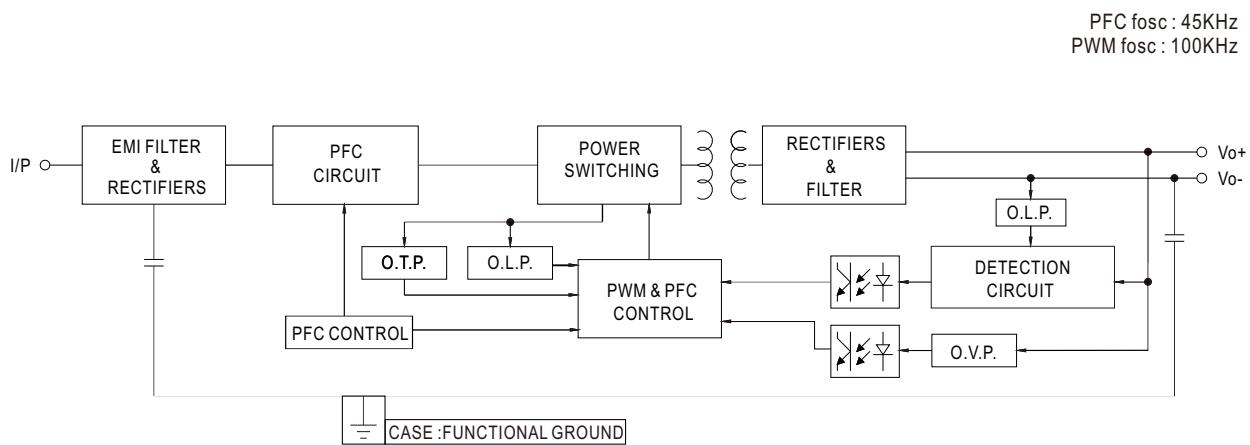

■ DRIVING METHODS OF LED MODULE



※ This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.

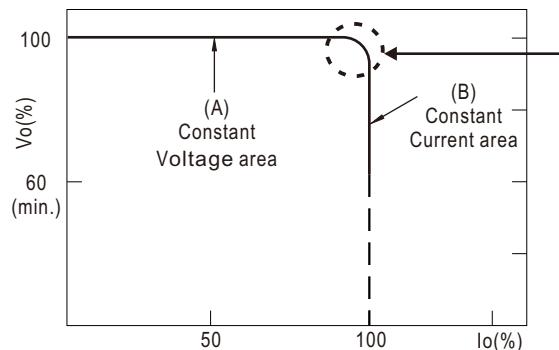

Typical output current normalized by rated current (%)


In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.
Should there be any compatibility issues, please contact MEAN WELL.

■ OUTPUT LOAD vs TEMPERATURE

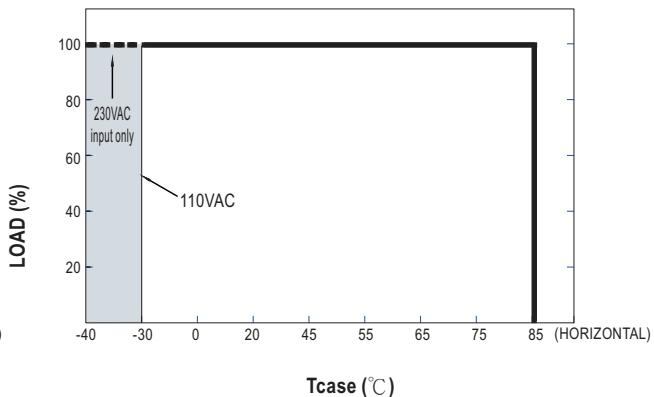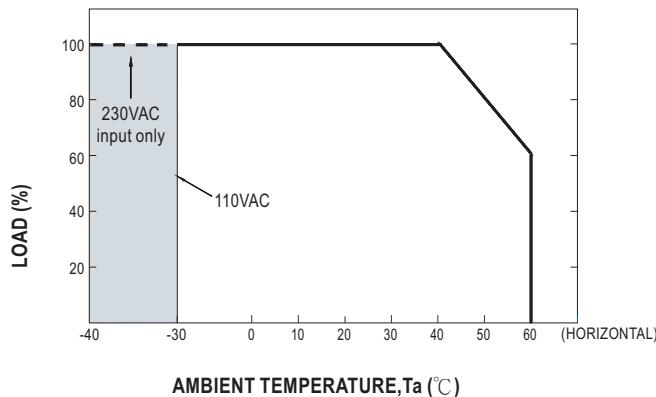


- ◎ If ELG-300 operates in Constant Current mode with the rated current, the maximum workable T_a is 40°C .

■ STATIC CHARACTERISTIC

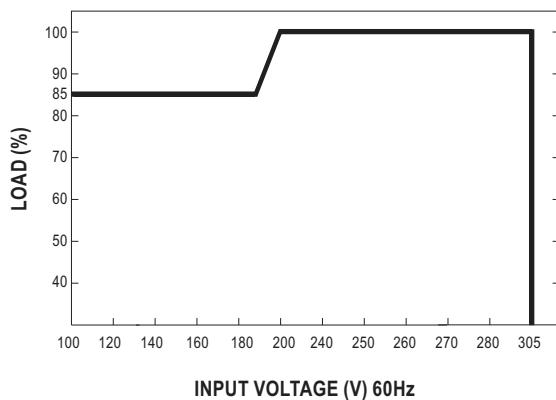


※ De-rating is needed under low input voltage.

■ POWER FACTOR (PF) CHARACTERISTIC

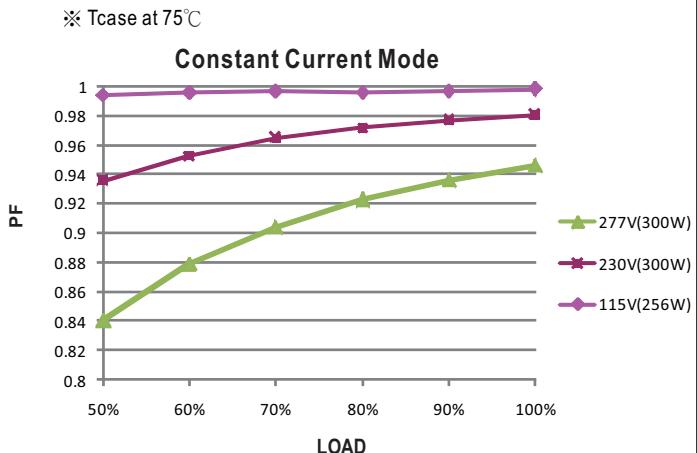

■ TOTAL HARMONIC DISTORTION (THD)


※ ELG-300-24A Model, T_{case} at 75°C

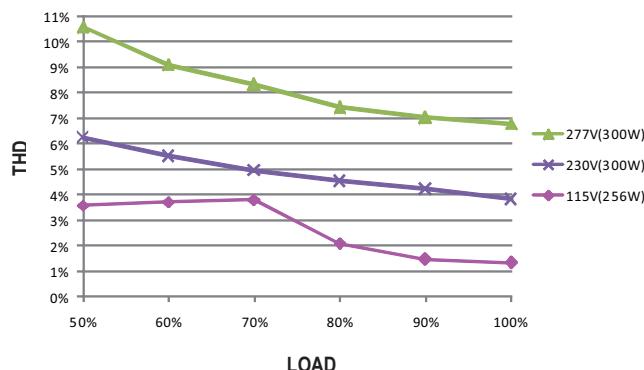


■ EFFICIENCY vs LOAD


ELG-300 series possess superior working efficiency that up to 94% can be reached in field applications.

※ ELG-300-24A Model, T_{case} at 75°C

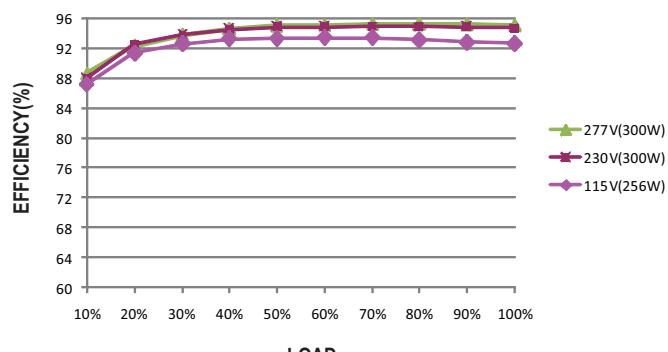


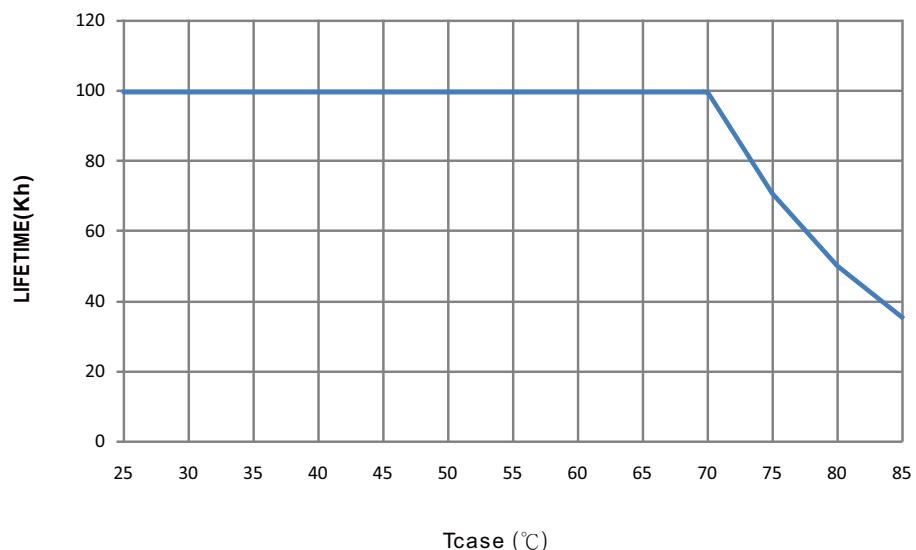■ LIFE TIME


■ MECHANICAL SPECIFICATION

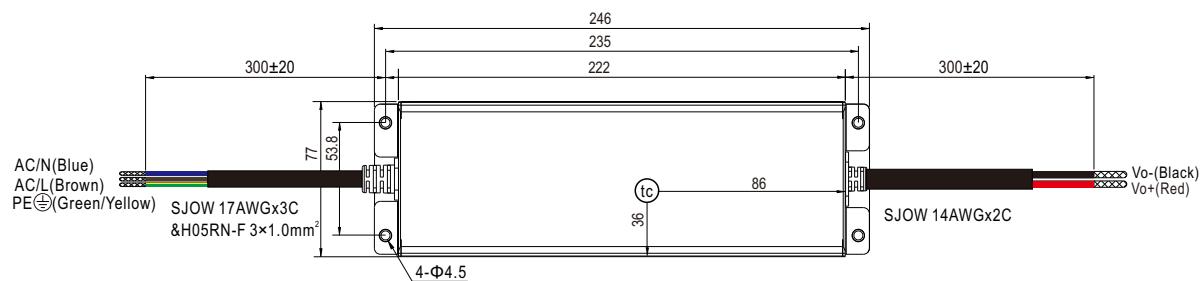 CASE NO.: 266A Unit:mm Tolerance: ± 1


• (tc) : Max. Case Temperature

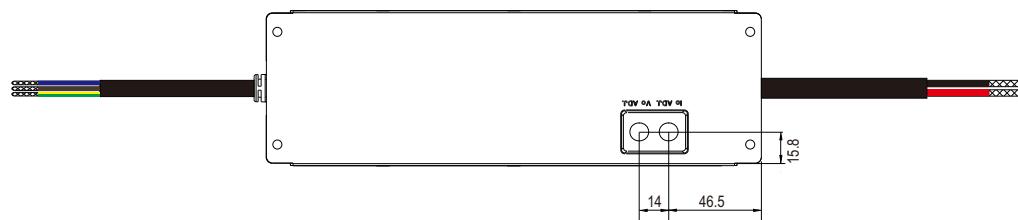

■ Recommend Mounting Direction

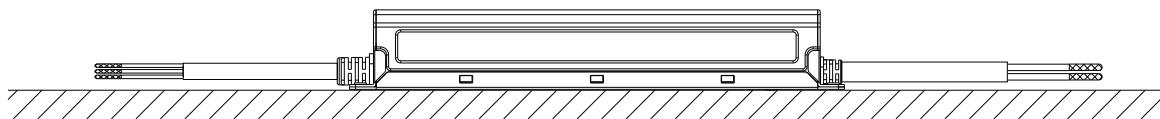

■ INSTALLATION MANUAL

 Please refer to: <http://www.meanwell.com/manual.html>